02 Force Vectors

Engineering Statics

Updated on: August 31, 2025


Scalars versus Vectors

- Physical quantities in this course are measured using either scalars or vectors.
- ► A scalar quantity can be fully specified by its magnitude (or size) and units alone.

 Examples are temperature, speed, mass, time, length, volume, density and energy.
- A vector quantity requires both magnitude and direction - in addition to units - to be fully specified.
 - Examples are displacement, velocity, force and momentum.
- ► 110 km/h is a speed. 110 km/h in a north-easterly direction is a vector.
- The vector quantity that is of most interest to us is force.


Graphical Vector Representation

- To represent a vector on a diagram, we draw a directed line segment – a line with an arrow tip.
- ▶ The length of the line segment is proportional to the magnitude of the vector.
- ▶ The direction of the line segment shows the direction of the vector.
- ► The arrow head gives the sense of that direction (up and rightwards in this case).



Graphical Vector Representation

- To represent a vector on a diagram, we draw a directed line segment – a line with an arrow tip.
- ▶ The length of the line segment is proportional to the magnitude of the vector.
- ▶ The direction of the line segment shows the direction of the vector.
- ► The arrow head gives the sense of that direction (up and rightwards in this case).




θ indicates the direction of the line of action of the vector v relative to some reference.


(I.e., the horizontal axis in this case.)

Multiplication of a vector by a scalar


Multiplication of a vector by a scalar affects the magnitude and, if the scalar is negative, the sense of the direction of the vector.




Consider two vectors, \boldsymbol{A} and \boldsymbol{B} :




Consider two vectors, A and B:




To add vectors \boldsymbol{A} and $\boldsymbol{B},$ written $\boldsymbol{A}+\boldsymbol{B},$ place the tail of \boldsymbol{B} at the tip of $\boldsymbol{A}.$



Consider two vectors, A and B:




To add vectors ${\bf A}$ and ${\bf B}$, written ${\bf A}+{\bf B}$, place the tail of ${\bf B}$ at the tip of ${\bf A}$.




The sum, A + B, is obtained by drawing a vector R from the tail of A to the tip of B.

$$A + B = R$$

Consider two vectors, \mathbf{A} and \mathbf{B} :



To add vectors A and B, written A+B, place the tail of B at the tip of A.





The sum, A + B, is obtained by drawing a vector R from the tail of A to the tip of B.

$$A + B = R$$


Note that the sum of two vectors is itself a vector.

$Addition\ of\ Vectors:: It's\ commutative!$










$Addition\ of\ Vectors:: It's\ commutative!$



Example 1: Displacement Vectors

A displacement is a change in position. It has a magnitude (the distance moved) and a direction, so displacement is a vector quantity.

A truck drives due east on a straight road for 40 km, then drives north on a straight road for 30 km before stopping.

What is the resultant displacement of the truck?

Example 2: Velocity Vectors

A plane flies NNW (i.e., 22.5° west of north) with a velocity of 275 km/h. There is a wind blowing at 55 km/h from the NW (i.e., 45° west of north).


Determine the resultant velocity of the plane relative to the ground.

Determine the wind speed that would cause the plane to fly due north. What is the ground speed in this case?

The Parallelogram Law and the Triangle Law of Vector Addition

The Parallelogram Law:


- 1. Draw the vectors with their tails at the same point.
- 2. Form a parallelogram
- The diagonal of the parallelogram, starting from the tails of the two vectors, is the resultant.



The Parallelogram Law and the Triangle Law of Vector Addition


The Parallelogram Law:

- 1. Draw the vectors with their tails at the same point.
- 2. Form a parallelogram
- The diagonal of the parallelogram, starting from the tails of the two vectors, is the resultant.




The Triangle Law:

- 1. This is what we have been doing
- To do the calculations on the parallelogram above, we end up working with the triangle(s) anyway
- 3. Use the triangle law.




Subtraction of Vectors

► Consider two vectors, **A** and **B**:




Subtraction of Vectors

► Consider two vectors, **A** and **B**:




Now consider —B, which is obtained by reversing the sense of B.




Subtraction of Vectors


► Consider two vectors, **A** and **B**:




Now consider —B, which is obtained by reversing the sense of B.



► Then, add A to -B: A - B = A + (-B) = R





Consider the sum of vectors \boldsymbol{A} , \boldsymbol{B} , \boldsymbol{C} , \boldsymbol{D} , \boldsymbol{E} and \boldsymbol{F} :




Consider the sum of vectors A, B, C, D, E and F:


Place all the vectors nose to tail.







- Place all the vectors nose to tail.
- Analyze the triangles. There are five sets of triangle calculations to do.







- Place all the vectors nose to tail.
- Analyze the triangles.
 There are five sets of triangle calculations to do.







- Place all the vectors nose to tail.
- Analyze the triangles. There are five sets of triangle calculations to do.







- Place all the vectors nose to tail.
- Analyze the triangles. There are five sets of triangle calculations to do.







- Place all the vectors nose to tail.
- Analyze the triangles.
 There are five sets of triangle calculations to do.








- Analyze the triangles.
 There are five sets of triangle calculations to do.
- ➤ This is too much work! We will find a more efficient way soon :)







Vector Addition of Forces

- Force is a vector quantity. It has a magnitude and a direction.
- ► Consider your weight. It is a force; it has a magnitude (newtons or pounds). It has a direction (along a line of action that passes between you and the centre of the earth). And it has a sense: down, towards the centre of the earth. If you step off a diving board, you will accelerate downwards in a predictable fashion.
- We have seen that we can add vectors together so we can do the same for forces.
- Multiple forces acting on an object through a point have a resultant force (the net force, which is the combined result of the summing together of the multiple forces).
- ► The forces which, when combined, sum to this resultant are known as component forces.


Consider forces A and B acting at point 0, as shown.




- Consider forces A and B acting at point 0, as shown.
- ► The resultant force, R, of forces A and B is the vector sum of A and B.




- Consider forces A and B acting at point 0, as shown.
- ► The resultant force, R, of forces A and B is the vector sum of A and B.
- ► A and B are component forces of R.




- Consider forces A and B acting at point 0, as shown.
- ► The resultant force, R, of forces A and B is the vector sum of A and B.
- ► A and B are component forces of R.
- C and D are also component forces of R.



- Consider forces A and B acting at point 0, as shown.
- ► The resultant force, R, of forces A and B is the vector sum of A and B.
- ► A and B are component forces of R.
- C and D are also component forces of R.
- ► ...as are E and F




- ► Consider forces **A** and **B** acting at point 0, as shown.
- ► The resultant force, R, of forces A and B is the vector sum of A and B.
- ► A and B are component forces of R.
- C and D are also component forces of R.
- ► ...as are E and F
- There are infinitely many possible component forces for each force R



Finding Resultants and Components


▶ In each of the examples just given, there were only two components but there can be many components for each resultant.



Finding Resultants and Components

▶ In each of the examples just given, there were only two components but there can be many components for each resultant.


► In this case, R is the resultant of 6 component forces: A, B, C, D, E and F



Finding Resultants and Components

▶ In each of the examples just given, there were only two components but there can be many components for each resultant.

- ► In this case, R is the resultant of 6 component forces: A, B, C, D, E and F
- ► In this course, for each force *R* we shall generally need only two components.




Resultant Forces


Example 3

Determine the magnitude and the direction (measured clockwise from the the positive x-axis) of the resultant of the two forces.

Note: One kilonewton is one thousand newtons, i.e., $1 \, \text{kN} = 1000 \, \text{N}$



Resultant Forces

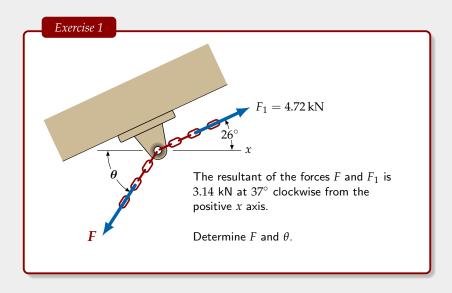

Mass, Force and Weight

- From Newton's Second Law of Motion, F = ma (force = mass x acceleration)
- ▶ The weight of an object is a force. It is the gravitational attractive force between the object and the earth.
- ▶ If we denote the acceleration due to gravity by g ($g = 9.81 \text{ m/s}^2$) and denote the mass of the object by m, then the weight of the object, W, is given by:

$$W = mg$$

▶ If the mass m is in kg and the acceleration due to gravity g is in m/s^2 , then the weight W is in newtons (N).

Metric (SI) Units of Measurement

- There are four basic quantities involved in F = ma: force, mass, distance and time.
- According to Newton, a net force of one newton (N) causes a mass of one kilogram (kg) to accelerate by 1 metre/sec/sec (m/s²).
- ► A rock dropped from a bridge is subject to a gravitational attractive force and will have an acceleration of 9.81 m/s². If the rock has a mass of 2.75 kg, this force is given by:

$$F = ma$$

= 2.75 kg × 9.81 m/s²
= 27.0 N

This force F is the weight, W, of the rock. So, W = mg

Metric (or SI) Units of Measurement

To summarize:

1.
$$1 \text{ N} = 1 \text{ kg} \times 1 \text{ m/s}^2 = 1 \text{ kg} \cdot \text{m/s}^2$$

- 2. To calculate the weight of an object from its mass, multiply the mass in kg by $g=9.81\,\mathrm{m/s^2}$. The weight is in newtons.
- 3. To calculate the mass of an object from its weight, divide the weight in newtons by $g=9.81\,\mathrm{m/s^2}$. The mass is in kilograms.

US Customary (or Imperial) Units of Measurement

Acceleration due to gravity in feet and seconds is

$$g = 32.2 \, \text{ft/s}^2$$


- ► The unit for force is the pound, or **lb**. (It may also be described as pound-force, or **lbf**.)
- ► The unit for mass is the slug.
- ▶ $1 \text{lb} = 1 \, \text{slug} \times 1 \, \text{ft/s}^2 \Rightarrow 1 \, \text{slug}$ has the units $\frac{\text{lb·sec}}{\text{ft}^2}$
- ▶ To calculate the mass of an object from its weight, divide the weight in pounds by $g = 32.2 \, \text{ft/s}^2$. The mass is in slugs.
- ▶ To calculate the weight of an object from its mass, multiply the mass in slugs by $g = 32.2 \, \text{ft/s}^2$. The weight is in pounds.

Component Forces

Example 4


The weight, W, of the traffic lights (with mass $105~{\rm kg}$) acts vertically downwards.

Find the value of W and use it to determine the magnitudes of its two components directed along the axes of AC and BC.



Component Forces

Exercise 2




Resolve the $4.20~\mathrm{kN}$ load suspended from A into components parallel to the truss members AB and AG. Give the magnitude of the components and their direction measured counter-clockwise from the positive x axis.

Component Forces

Exercise 3


The decoration suspended at D weighs $1120\,\mathrm{N}$.

Determine the magnitudes of the two force components of the weight of D, in the direction of AB and BC.



Resultant & Component Forces


- *a*) Determine the resultant *R* of the two vectors *F* and *G*.
- *b*) Determine the *x*-component of *R* (i.e., the horizontal component).
- c) Determine the x-component of F.
- d) Determine the x-component of G.
- e) Add the two previous results.
 Compare it with the result from b above.




Resultant & Component Forces

Exercise 4


- a) Determine the magnitude of the component of R (found in the previous example) along the y-axis (i.e., the vertical component).
- b) Determine the magnitude of the component of F along the y axis.
- c) Determine the magnitude of the component of G along the y axis.
- d) Add the two previous results.




When a force vector, F, is resolved into horizontal and vertical components (i.e., along the x-axis and the y-axis), they are referred to as **rectangular components** (or x and y-components).




When a force vector, F, is resolved into horizontal and vertical components (i.e., along the x-axis and the y-axis), they are referred to as **rectangular components** (or x and y-components).



$$F = F_x + F_y$$



When a force vector, F, is resolved into horizontal and vertical components (i.e., along the x-axis and the y-axis), they are referred to as **rectangular components** (or x and y-components).



Force F is resolved into component vectors F_x and F_y along the x and y-axes.


$$F = F_x + F_y$$

We know the directions of the component vectors (along the axes) so we are generally only interested in the magnitude of these vectors, which is a scalar value. The magnitudes of F_x and F_y are given by the scalar values:

$$\mathbf{F}_{x} = |F| \cdot \cos \theta$$
 and $\mathbf{F}_{y} = |F| \cdot \sin \theta$

where |F| is the length/magnitude of F.

When a force vector, F, is resolved into horizontal and vertical components (i.e., along the x-axis and the y-axis), they are referred to as **rectangular components** (or x and y-components).



Force F is resolved into component vectors F_x and F_y along the x and y-axes.

$$F = F_x + F_y$$


We know the directions of the component vectors (along the axes) so we are generally only interested in the magnitude of these vectors, which is a scalar value. The magnitudes of F_x and F_y are given by the scalar values:


$$F_x = |F| \cdot \cos \theta$$
 and $F_y = |F| \cdot \sin \theta$


where |F| is the length/magnitude of F.

► Rectangular components along the negative axes have negative scalar values.

Rectangular Components: Signs by Quadrant




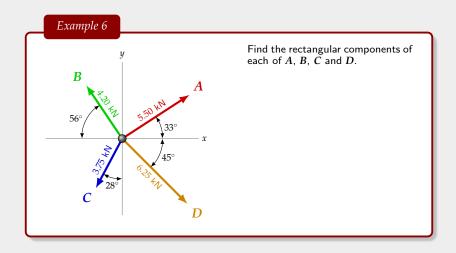




$$A_x = 5.50 \cos 33^{\circ} \text{ kN} = 4.61 \text{ kN}$$

 $A_y = 5.50 \sin 33^{\circ} \text{ kN} = 3.00 \text{ kN}$




$$A_x = 5.50 \cos 33^{\circ} \text{ kN} = 4.61 \text{ kN}$$

 $A_y = 5.50 \sin 33^{\circ} \text{ kN} = 3.00 \text{ kN}$
 $B_x = -4.20 \cos 56^{\circ} \text{ kN} = -2.35 \text{ kN}$
 $B_y = 4.20 \sin 56^{\circ} \text{ kN} = 3.48 \text{ kN}$



$$\begin{split} &A_x = 5.50\cos 33^\circ \text{ kN} = 4.61 \text{ kN} \\ &A_y = 5.50\sin 33^\circ \text{ kN} = 3.00 \text{ kN} \\ &B_x = -4.20\cos 56^\circ \text{ kN} = -2.35 \text{ kN} \\ &B_y = 4.20\sin 56^\circ \text{ kN} = 3.48 \text{ kN} \\ &C_x = -3.75\sin 28^\circ \text{ kN} = -1.761 \text{ kN} \\ &C_y = -3.75\cos 28^\circ \text{ kN} = -3.31 \text{ kN} \end{split}$$



$$\begin{aligned} & A_x = 5.50\cos 33^\circ \text{ kN} = 4.61 \text{ kN} \\ & A_y = 5.50\sin 33^\circ \text{ kN} = 3.00 \text{ kN} \\ & B_x = -4.20\cos 56^\circ \text{ kN} = -2.35 \text{ kN} \\ & B_y = 4.20\sin 56^\circ \text{ kN} = 3.48 \text{ kN} \\ & C_x = -3.75\sin 28^\circ \text{ kN} = -1.761 \text{ kN} \\ & C_y = -3.75\cos 28^\circ \text{ kN} = -3.31 \text{ kN} \\ & D_x = 6.25\cos 45^\circ \text{ kN} = 4.42 \text{ kN} \\ & D_y = -6.25\cos 45^\circ \text{ kN} = -4.42 \text{ kN} \end{aligned}$$


Force Resultants using Rectangular Components

To determine the resultant of several forces:

- 1. Resolve each force into its *x* and *y*-components.
- 2. Sum the x components, ΣF_x .
- 3. Thenk $\Sigma F_x = R_x$, the *x*-component of the resultant.
- 4. Similarly, sum the y components, ΣF_y , to find R_y , the y-component of the resultant.
- 5. From the R_x and R_y , determine the magnitude and direction of the resultant vector.


This process makes finding the resultant of more than two forces much simpler than repeated applications of the triangle or parallelogram laws.

From Rectangular Components to the Resultant Components

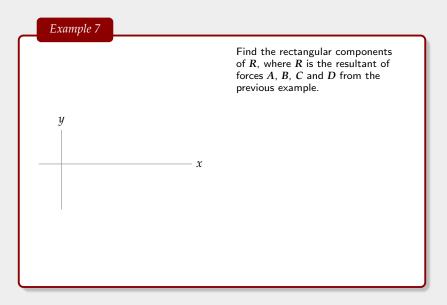

From Rectangular Components to the Resultant Components






Find the rectangular components of R, where R is the resultant of forces A, B, C and D from the previous example.

$$\begin{split} R_{\rm X} &= \Sigma F_{\rm X} \\ &= 4.6127~{\rm kN} - 2.3486~{\rm kN} \\ &- 1.7605~{\rm kN} + 4.4194~{\rm kN} \\ &= 4.9230~{\rm kN} \end{split}$$

From Rectangular Components to the Resultant Components






Find the rectangular components of R, where R is the resultant of forces A, B, C and D from the previous example.

$$\begin{split} R_{\rm x} &= \Sigma F_{\rm x} \\ &= 4.6127~{\rm kN} - 2.3486~{\rm kN} \\ &- 1.7605~{\rm kN} + 4.4194~{\rm kN} \\ &= 4.9230~{\rm kN} \end{split}$$


$$\begin{split} R_y &= \Sigma F_y \\ &= 2.9955 \,\, \mathrm{kN} + 3.4820 \,\, \mathrm{kN} \\ &- 3.3111 \,\, \mathrm{kN} - 4.4194 \,\, \mathrm{kN} \\ &= -1.2530 \,\, \mathrm{kN} \end{split}$$

Example 8


 Draw the components. (Negative components are drawn along the negative axes.)



- Draw the components. (Negative components are drawn along the negative axes.)
- 2. Form a rectangle.




- Draw the components. (Negative components are drawn along the negative axes.)
- 2. Form a rectangle.
- 3. Draw the resultant (the diagonal of the rectangle, starting at the origin).




- Draw the components. (Negative components are drawn along the negative axes.)
- 2. Form a rectangle.
- 3. Draw the resultant (the diagonal of the rectangle, starting at the origin).
- 4. The magnitude of the resultant is given by

$$|R| = \sqrt{(4.9230 \text{ kN})^2 + (1.2530 \text{ kN})^2} = 5.0800 \text{ kN} = 5.08 \text{ kN}$$



Example 8

- Draw the components. (Negative components are drawn along the negative axes.)
- 2. Form a rectangle.
- 3. Draw the resultant (the diagonal of the rectangle, starting at the origin).



4. The magnitude of the resultant is given by


$$|R| = \sqrt{(4.9230 \text{ kN})^2 + (1.2530 \text{ kN})^2} = 5.0800 \text{ kN} = 5.08 \text{ kN}$$

5. The direction of the resultant is given by

$$\theta = \tan^{-1} \frac{|R_y|}{|R_x|} = \tan^{-1} \left[\frac{1.2530}{4.9230} \right] = 14.280^{\circ} = 14.3^{\circ}$$

Example 8

- Draw the components. (Negative components are drawn along the negative axes.)
- 2. Form a rectangle.
- 3. Draw the resultant (the diagonal of the rectangle, starting at the origin).



4. The magnitude of the resultant is given by


$$|R| = \sqrt{(4.9230 \text{ kN})^2 + (1.2530 \text{ kN})^2} = 5.0800 \text{ kN} = 5.08 \text{ kN}$$

5. The direction of the resultant is given by

$$\theta = \tan^{-1} \frac{|R_y|}{|R_x|} = \tan^{-1} \left[\frac{1.2530}{4.9230} \right] = 14.280^{\circ} = 14.3^{\circ}$$


R is 5.08 kN at 14.3° , measure clockwise from the positive x-axis.

Example 9



Determine the resultant (magnitude and direction counterclockwise from the positive x axis) of the three forces F_1 , F_2 and F_3 acting at a single point.

Example 10



The resultant of the forces F, F_1 and F_2 acting upon the eye-bolt is $3.07~\mathrm{kN}$ at 197° measured counter-clockwise from the positive x axis.

Determine F and θ .